




## IT'S SO EASY TO BE INDIVIDUAL!

Get unique designs with our CAD-CUT® patterns. Select a pattern of your choice from our catalog or create your own unique look. All we need is your design as a step and repeat file and you will receive your individual heat transfer vinyl. CAD-CUT® Pattern is characterized by a soft, pleasant haptic. It is ideal for cutting small details and is very easy to weed.

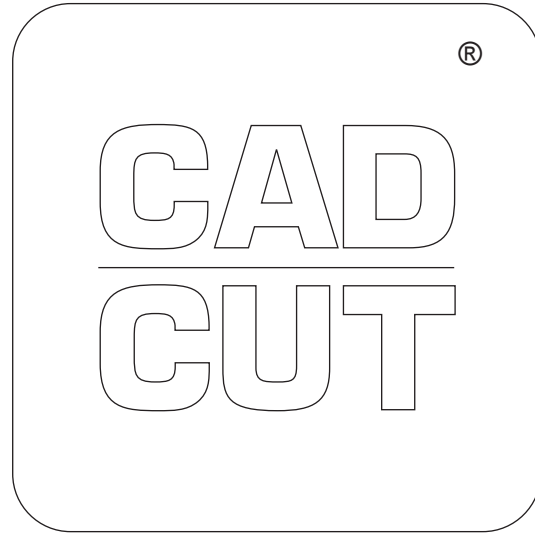

**AVAILABLE IN**  
50 cm x 25 m roll

## RECOMMENDED FABRICS

- 100% cotton
- 100% polyester\*
- 100% nylon
- Polyester-cotton blends

\* Test before application!

## CUTTING NOTES

You should always test cut prior to any production run. Remember-cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 1 mm for lettering and logos.

## APPLICATION INSTRUCTIONS

- Temperature: 150° C
- Time: 10-15 sec.
- Pressure: medium
- (#4-6 on Hotronix®)
- Peel: warm/cold

## ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®, LED Weeder. LED Pin or Tweezers

## CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Do not dry-clean. Do not iron directly onto CAD-CUT® Pattern (use cover sheet).

## STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

## DETAILS



## KEY

Easy weed	Thin
Ironable	Sticky carrier
Ironable only inside out	Multi-color application
Washable	Peel hot
Sublimation	Application
Stretchable	Pressure
Flock	




color swirl



musical heart



rainbow lines



mosaic colors




eye of the peacock




red lines



natural wood



colorful honey-comb




hexagon




symbolic signs




energy




bubbles




bluegold



inks



berry drops



berry nature