

SOLAR

SOL 102

EXTERNAL APPLICATION

INFORMATION



TOTAL REJECTED SOLAR ENERGY:	79%
SOLAR ENERGY REFLECTION:	65%
SOLAR ENERGY TRANSMISSION:	11%
SOLAR ENERGY ABSORPTION:	24%
SOLAR FACTOR G:	21%
UV BLOCKING:	99%
MATERIAL:	PET
ADHESIVE:	Acrylic polymer
LINER:	Siliconed PET 23 microns
THICKNESS:	110 microns
APPLICATION FACE:	External
COLOR:	Silver
APPLICATION T°:	min, + 5°C
FIRE RATING:	B-S1, D0
STANDARDS:	EUROCLASSES
GUARANTEE:	5 years
WIDTH:	1,52 m
LENGTH:	2,5 / 5 / 10 / 30 m

SOL 102 protection film has been designed to be applied to the glazing to reduce heat and glare from the sun. The Solar film SOL 102 rejects over 79 % of the solar energy and reduces UV radiation. The film keeps the glass transparent and does not disperse light in all directions. **Solar protection 83%.**


Application Method

The glass surface has to be free from dust, grease or other contaminants to be glued on.

Production and standards

In order to constantly improve our production we may change a product color and manufacturing process without prior notice. Before applying our products we recommend that our users ensure that the film is suitable for the intended use and comply with current standards.

To meet high levels of requirements, we do not recommend to mix different production batches.

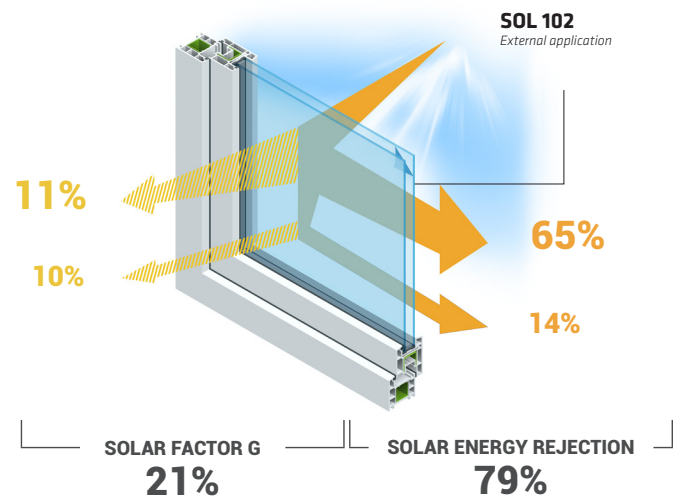

Use: Réfectiv window films are designed for use on any type of clear normal glass



Maintenance after 30 days: with usual cleaning solutions (non-abrasive, without ammonia...). Cleaning products that may scratch the film should be avoided.



Stockage: 2 years from delivery. This film should be kept away from excessive humidity and sun rays, at temperatures below 38°C.